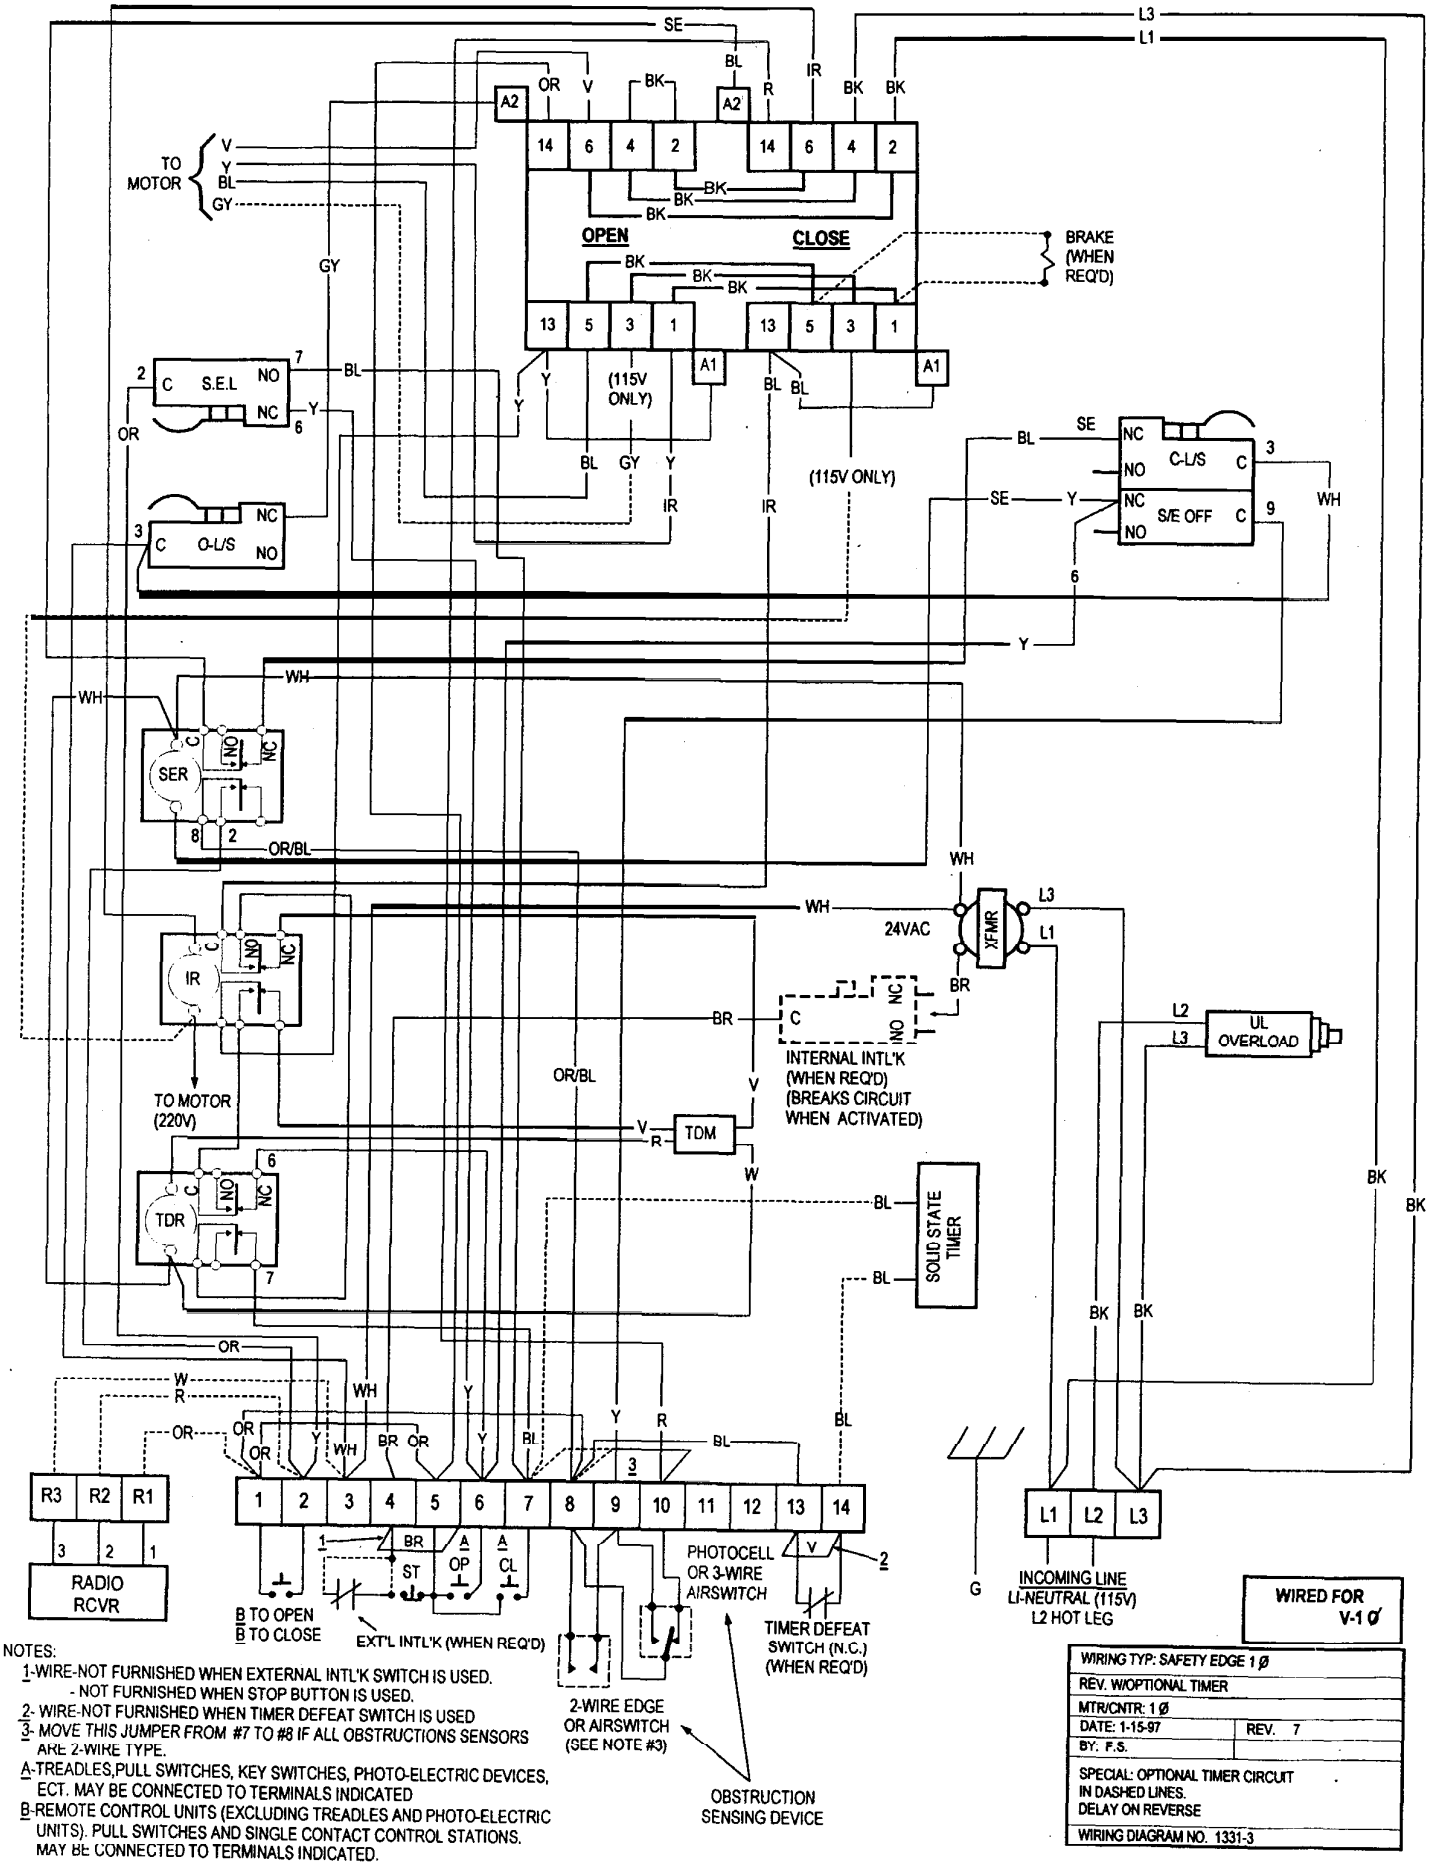

NOTES:

1-WIRE-NOT FURNISHED WHEN EXTERNAL INTL'K SWITCH IS USED.
- NOT FURNISHED WHEN STOP BUTTON IS USED.

2- WIRE-NOT FURNISHED WHEN TIMER DEFEAT SWITCH IS USED

3- MOVE THIS JUMPER FROM #7 TO #8 IF ALL OBSTRUCTIONS SENSORS ARE 2-WIRE TYPE.

A-TREADLES,PULL SWITCHES, KEY SWITCHES, PHOTO-ELECTRIC DEVICES, ECT. MAY BE CONNECTED TO TERMINALS INDICATED

B-REMOTE CONTROL UNITS (EXCLUDING TREADLES AND PHOTO-ELECTRIC UNITS). PULL SWITCHES AND SINGLE CONTACT CONTROL STATIONS. MAY BE CONNECTED TO TERMINALS INDICATED.

WIRING TYP: SAFETY EDGE 1 Ø	
REV. W/OPTIONAL TIMER	
MTR/CNTR: 1 Ø	
DATE: 1-15-97	REV. 7
BY: F.S.	
SPECIAL: OPTIONAL TIMER CIRCUIT IN DASHED LINES. DELAY ON REVERSE	
WIRING DIAGRAM NO. 1331-3	