

**Premium
Residential & Commercial Slide Gate Operator**

SlideWinder

Simple. Reliable. Secure.



CLEAN STAINLESS STEEL CABLE DRIVE

No more rusty, ugly, dangling, grimy, open-to-the-elements maintenance prone chain that jerks your gate open and closed.

WHISPER QUIET

Install SlideWinder close to living spaces. SlideWinder is quiet.


KEEPS RUNNING DURING POWER OUTAGE

SlideWinder's unique UPS* battery backup virtually guarantees that your gate operates normally (with access controls and safety equipment fully operational) for hundreds of feet of gate travel after you lose power.



*uninterruptible power supply

ULTRA RELIABLE

SlideWinder comes with a 5-year limited warranty. It's rated for continuous duty. It meets the HySecurity standard of highest quality and reliability. Users can expect years of low maintenance and ultra-reliable service from SlideWinder and all HySecurity operators.

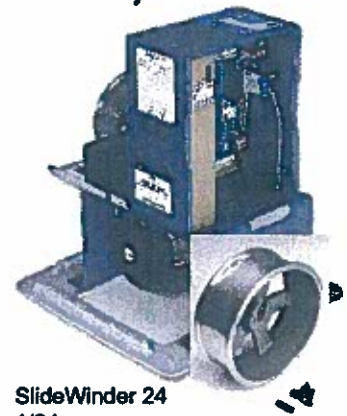


SlideWinder 24
1/2 hp
125 lb. pull force
1,200 lb. max gate weight
24' max gate travel
UL Class I - IV
115/208-230 single phase
50 or 60 Hz

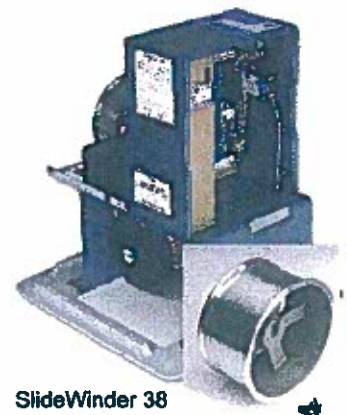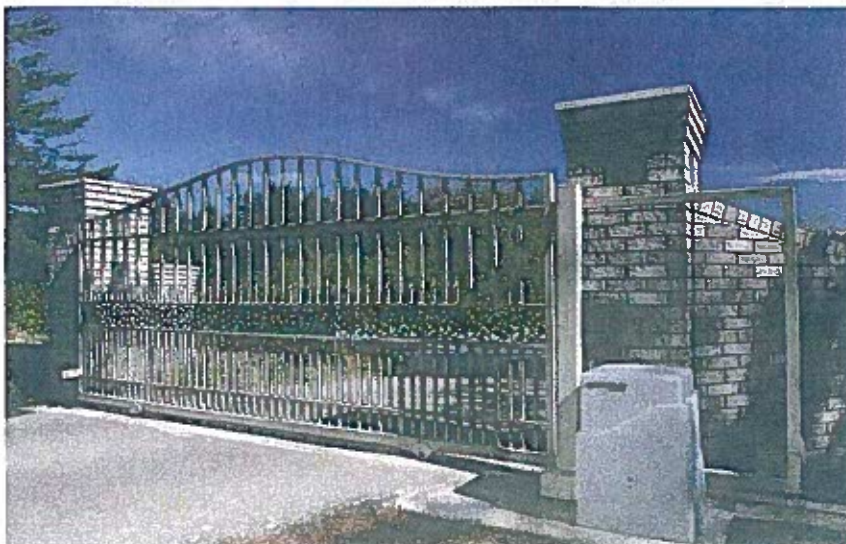


SlideWinder 38
1 hp
200 lb. pull force
2,000 lb. max gate weight
38' max gate travel
UL Class I - IV
115/208-230 single phase
50 or 60 Hz


SlideWinder Specifications

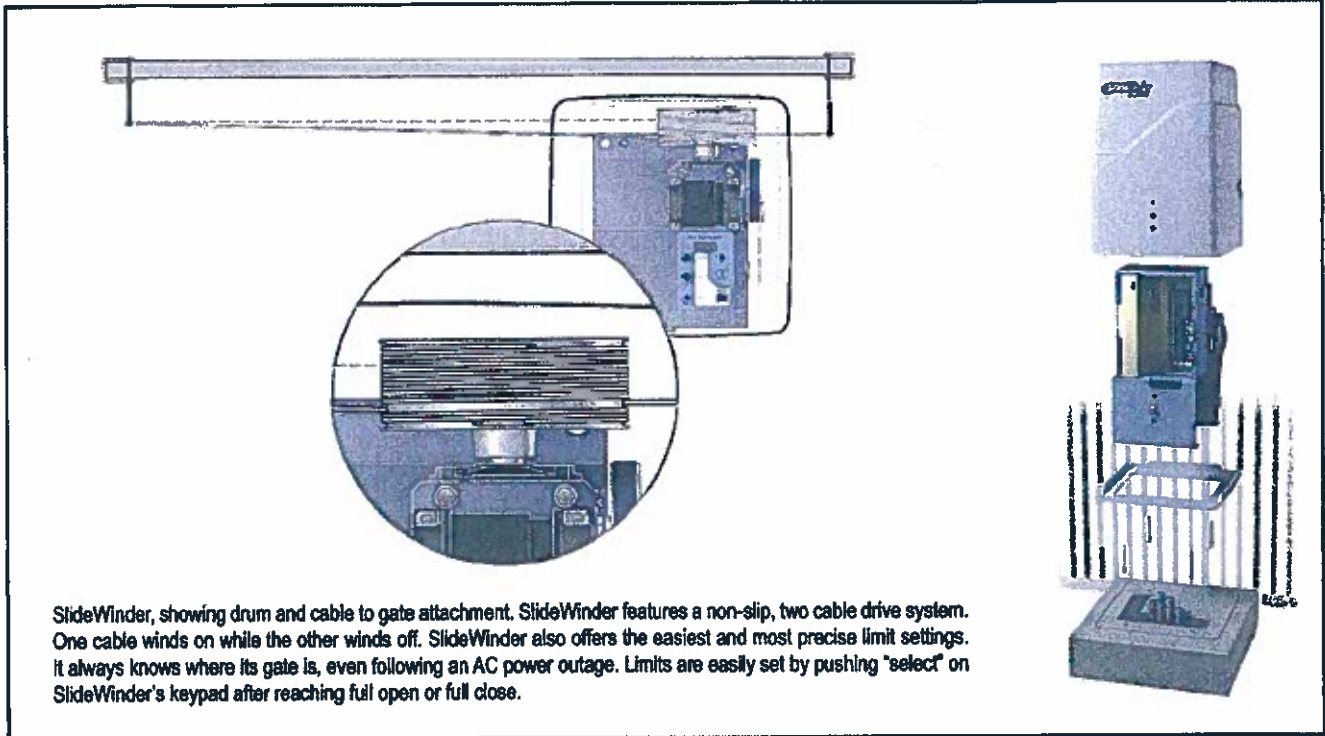


Conduit Locations

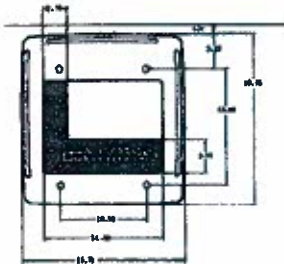


Standard
no baseriser



12" base riser
no extra batteries



12" base riser
with heavy duty batteries



Future Models

SlideWinder 24F	Fast		Installer adjustable variable speed version up to 2'/sec. of SlideWinder 24.	UL Class I-IV for speeds up to 1'/sec.; UL Class II-IV for speeds above 1'/sec.
SlideWinder 24S		Solar	Solar powered version of SlideWinder 24.	UL Class I-IV
SlideWinder 24FS	Fast	Solar	Fast (up to 2'/sec.) solar powered version of SlideWinder 24S.	UL Class I-IV for speeds up to 1'/sec.; UL Class II-IV for speeds above 1'/sec.
SlideWinder 38F	Fast		Installer adjustable variable speed version up to 2'/sec. of SlideWinder 38.	UL Class I-IV for speeds up to 1'/sec.; UL Class II-IV for speeds above 1'/sec.
SlideWinder 38VF	Very Fast		Installer adjustable variable speed version (up to 3'/sec.) of SlideWinder 38.	UL Class I-IV for speeds up to 1'/sec.; UL Class II-IV for speeds above 1'/sec.
SlideWinder 38S		Solar	Solar powered version of SlideWinder 38.	UL Class I-IV
SlideWinder 38FS	Fast	Solar	Fast (up to 2'/sec.) solar powered version of SlideWinder 38F.	UL Class I-IV for speeds up to 1'/sec.; UL Class II-IV for speeds above 1'/sec.

w/12" base riser for easy retrofit or extended service batteries

